



**UNIVERSAL TUBE AND PIPE INDUSTRIES FZE**

P. O. BOX: 16879, JEBEL ALI FREE ZONE, DUBAI-UNITED ARAB EMIRATES,  
 TEL. : 00971 4 8835966, FAX.: -00971 4 8835675,  
 E-mail: utpinfo@universaltubes.com  
 Website: www.utpgroup.co

**DECLARATION OF PERFORMANCE**

(According to Annex III Construction Products Regulation EU No 305/2011 and Regulation as per EU No. 574/2014)

**No: UTP/DOP/001 Rev.03**


For the construction product		Cold formed welded structural hollow sections of non- alloy steels & fine grain steel.
1)	Unique identification code of the product type	EN 10219-1:2006, Gr. S235JRH <b>Size:-</b> 1) CFCHS -OD-21.3-168.3 MM,WT-1.5 TO 7.0 MM 2) CFRHS- 40 X 20-150 X 75 MM,WT-1.5 TO 7.0 MM 3) CFSHS-16 X 16-100 X 100 MM,WT-1.5 TO 7.0 MM
2)	Intended use	Cold formed steel hollow sections for Building & Civil Engineering.
3)	Manufacturer	<b>Universal Tube and Pipe Industries FZE.</b> P.O. Box: 16879, Jebel Ali Free Zone, Dubai-United Arab Emirates, TEL.: 00971 4 8835966, FAX.: 00971 4 8835675, Email: utpinfo@universaltubes.com Website: www.utpgroup.co
4)	Authorised representative	None
5)	System or systems of assessment and verification of constancy of performance of the construction product	System 2+
6)	Harmonized Standard:  Notified body:	EN 10219-1:2006, annex ZA  TÜV NORD Systems GmbH & Co. KG D-22525 Hamburg, Kenn.Nr. 0045.
7)	Declared Performance	

Essential Characteristics	Performance	Harmonised Technical Specification														
Tolerance s on dimensions and shape	EN 10219-2 Correspond	EN 10219-1:2006														
Elongation %	24 min															
Tensile Strength, MPa	360-510 for Thickness < 3 mm 360-510 for Thickness ≥ 3 ≤ 7 mm Correspond															
Yield Strength, MPa	235 min for Thickness < 7 mm															
Weldability (CEV)	Chemical Composition Cast analysis of product (% by mass) Max															
	<table border="1"> <thead> <tr> <th>C</th> <th>Si</th> <th>Mn</th> <th>P</th> <th>S</th> <th>N</th> <th>CEV</th> </tr> </thead> <tbody> <tr> <td>0.17</td> <td>--</td> <td>1.40</td> <td>0.040</td> <td>0.040</td> <td>0.009</td> <td>0.35</td> </tr> </tbody> </table>		C	Si	Mn	P	S	N	CEV	0.17	--	1.40	0.040	0.040	0.009	0.35
	C		Si	Mn	P	S	N	CEV								
0.17	--		1.40	0.040	0.040	0.009	0.35									
Impact Strength, J	For thickness < 6mm: NPD; and for ≥ 6mm : 27J min at test temperature 20°C															
Dangerous substance X	Less than 0.2 ppm															

The performance of the product identified above is in conformity with the set of declared performance.

This declaration of performance is issued, in accordance with regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

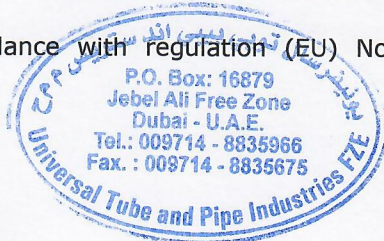

*[Signature]*  
 AMBIKA YADAV  
 QA/QC MANAGER

Place: Universal Tube & Pipe Industries FZE

Date: 08.07.2025